

TFD-4010M12B

Ventilateur performant & silencieux

En boite

Alimentation : 12V 0.07A


Dimensions : L=40mm l=40 h=10 mm

Vitesse : 5000RPM

Longévité moyenne : 50000 Heures soit 5,4 ans en continue

Connecteur femelle carte mère PC


Garantie 1 an




4010 series

40x40x10 mm

P&Q Curve

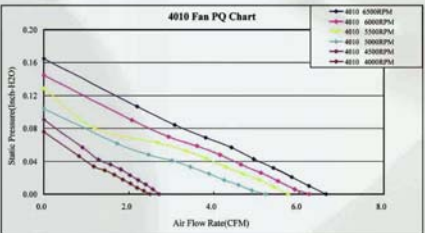

Dimensions Drawing

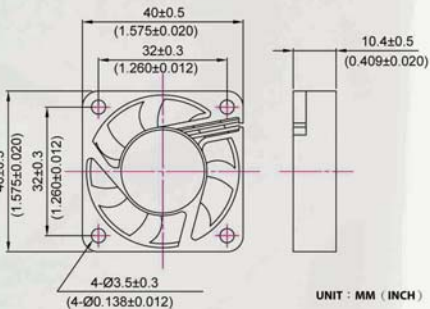

UNIT : MM (INCH)

Specifications

- Material : Impeller & Frame : Plastic(UL 94V-0)
- Lead Wires : UL 1007 AWG#28 Or Equivalent
- Red Wire Positive(+), Black Wire Negative(-), Yellow Wire Or Blue Wire Signal(FG)
- Function type is optional
- The max air flow and the speed are measured in free air; max air pressure is measured at zero air flow
- Noise is measured in anechoic chamber in free air, one meter from intake side
- All readings are typical values at rated voltage
- Specifications are subject to change with notice
- Additional special function may be added according the requirement of customer

Model	Rated Voltage (VDC)	Rated Current (AMP)	Power Consumption (WATTS)	Speed Reference (RPM)	Air Flow (CFM)	Static Pressure (Inch-H ₂ O)	Noise (dBA)
TFD-4010HH05X	5	0.18	0.9	6000	6.24	0.15	<25
TFD-4010H05X	5	0.14	0.7	5500	5.75	0.13	<23
TFD-4010M05X	5	0.12	0.6	5000	5.22	0.1	<21
TFD-4010L05X	5	0.1	0.5	4500	2.71	0.09	<19
TFD-4010LL05X	5	0.08	0.4	4000	2.5	0.08	<17
TFD-4010TH12X	12	0.12	1.44	6500	6.64	0.16	<26
TFD-4010HH12X	12	0.1	1.2	6000	6.24	0.15	<25
TFD-4010H12X	12	0.08	0.96	5500	5.75	0.13	<23
TFD-4010M12X	12	0.07	0.84	5000	5.22	0.1	<21
TFD-4010L12X	12	0.05	0.6	4500	2.71	0.09	<19
TFD-4010LL12X	12	0.04	0.48	4000	2.5	0.08	<17